


Shenzhen Enster Electronics Co.,LTD

Wide Angle 1080P 2.0 Megapixels Corner Mount IP Camera for Elevator

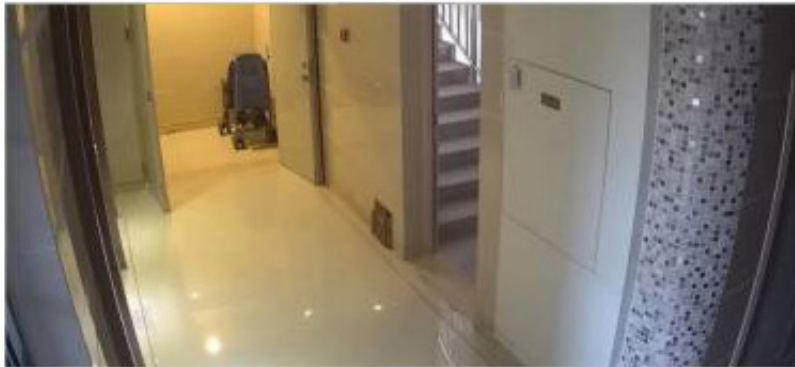

Corner Mount Ip camera

Elevator Camera

2.0MP SONY STARVIS Sensor

Wide angle 135 Degree

NST-IPH9935(5.0Megapixels)

NST-IPH9932(2.0Megapixels)

NST-IPH99313(1.3Megapixels)

Camera Type		Corner IP Camera		
System		Embedded RTOS design		
Camera	Effective Pixels	5.0 Mega Pixels	2.0 Mega pixels	1.3 Mega Pixels
		Main stream:2592*1944; Sub stream:704*576	Main stream:1920*1080;1 280*720 Sub stream:704*576	Main stream:1280*960; Sub stream:704*576
		Frames Rates	PAL:15fps(2592*1944) NTSC:15fps(2592*1944)	PAL:25fps(1920*1080)/(1 280*720) NTSC:30fps(1920*1080)/ (1280*720)
	Image Sensor	1/2.8" SONY IMX335 STARVIS Sensor 5 megapixel resolution 2688H*1944V	1/2.8" SONY IMX307 STAVIS Sensor 2.13 megapixel resolution (1945H*1097V)	1/3" APTINA 0130 CM Sensor 1.3 megapixel resolution (1305H*977V)
		DSP	Dual core 32-bit DSP (HI3516E)	Dual core 32-bit DSP (Hi3516E)
	Min. Illumination	Color 0.001Lux@F1.2	Color 0.01Lux@F1.2	Color 0.01Lux@F1.2
		B/W 0.0001	B/W 0.001	B/W 0.01 Lux@F1.2

		Lux@F1.2	Lux@F1.2	
	Adjust Parameters	DWDR,BLC,DNR,AE,AGC,D&N,Mirror,Flip,etc.		
Video	Compression	H.265/H.264 Main profile	H.265/H.264 Main profile	H.265/H.264 Main profile
	Stream	support dual stream,AVI format	support dual stream,AVI format	support dual stream,AVI format
	Bit Rate	support 0.1M ~8Mbps bit rate adjustable	support 0.1M ~8Mbps bit rate adjustable	support 0.1M ~8Mbps bit rate adjustable
	Frame Rates	support 1~30fps adjust	support 1~30fps adjust	support 1~30fps adjust
Audio	Input and output	1ch input(micphone),1ch output(Speaker&micphone) Optional		
	Compression	G.711 compression,support two-way audio intercom,support audio and video synchronized output		
Alarm	Types	Motion Detection, Video Blind , Video Loss		
Network	WEB Browser	Support WEB remote config(IE, Safari, Google Chrome, Firefox etc.)		
	Smart Phone	mobile remote Monitoring (iPhone,Android,....)		
	CMS Software	Uniform CMS Software(multiple devices management system)		
	Cloud P2P	www.enster.com ,MYEYE platform and other program,Offer SDK		
	Network	1 * RJ45,10/100M,Support RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP/SMTP		
	ONVIF	Support (ONVIF 2.4)		
	POE	Support(optional)		
	WIFI	N/A		
General	Language	20 kinds of languages such as English, Finnish, French, German, Greek, Italian, Japanese, Polish, Portuguese, Russian, Spanish, Thai, S-Chinese, T-Chinese and Turkish		
	IR Cut Filter	Set of double light switch IR-CUT filter		
	Lens Mount	Board Lens 3.6mm		
	Infrared Luminary	1pcs Mini Array IR LED		

Infrared Wavelength	850nm	
Illuminate Distance	8m	
Waterproof Criterion	IP 55	
I/O Connector	1*DC Connector ,1* RJ45(10/100M Network)	
Supplied Voltage	DC12V/PoE(802.3af/820.3at)	
Power Consumption	IR On: 600mA max., IR Off: Less than 200mA	
Working Environment	-10 ° C~+60 ° C, 10%~90% (Built in Heater being optional added for environment lower than -20 °)	
Weight	0.4kg	

Elevator IP CCTV Solution

1 Wire Corner IP Camera and 2 pcs Wireless Bridge

电梯监控安装方式

安装方式一



安装方式二

