


Shenzhen Enster Electronics Co.,LTD

Low Lux SONY STARVIS Sensor Wireless IP Board Camera
Module Support 128GB Micro SD Card

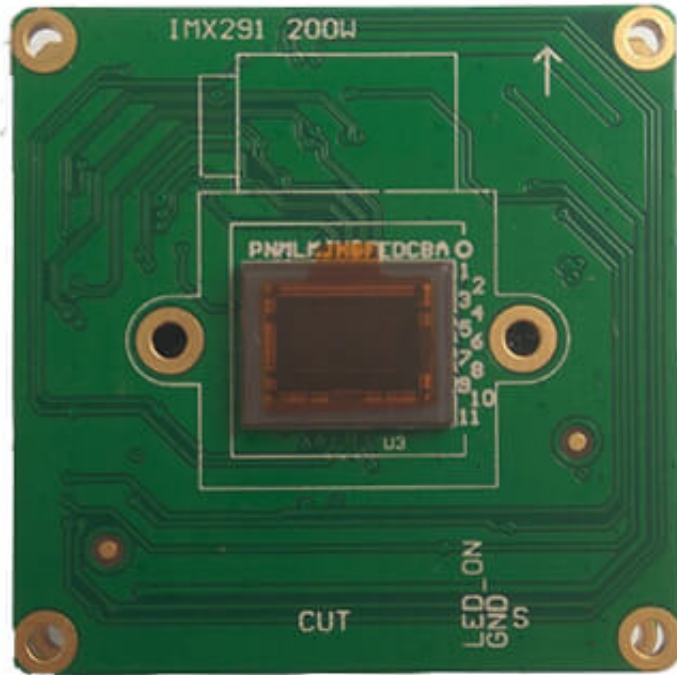

Low Lux SONY STARVIS Sensor IMX291

Wireless IP Board Camera Module

Support 128GB Micro SD Card

Support Microphone And Speaker

Support FTP and Email Alarm

Support ONVIF

Support RS 485

Specification:

* 10800P: 1/2.8" 2MP Sony image CMOS sensor ;

* Day / Night mode support external triggering by CDS (or 3.5V ~ 5V voltage signal);

* Support standard CS/M12 lens

* Operation Temperature -20C ~ +50C;

* PAL / NTSC selectable on OSD menu.

* Support TF Card Storage max 128GB(1080P)

* 1080P Supports both H.265&H.264

*Self AP: can connect the wifi emitted by the camera itself


*Support onvif RTSP

Video	Resolution	2.0MP(1920*1080P)
	Sensor	1/2.8" SONY IMX291 CMOS sensor with ICR
	DSP	HiSilicon 3516C
	Compression standard	H.264/H.264
	IR-Cut	Built-in IR Cut.No color deviation indoor and outdoor
	Lens Mount	Board Lens
	Image Frame Rate	30fps maximum,downward adjustable
	Night Vision	IR LEDs/ White Light
Audio	Input and output	1ch input(microphone),1ch output(Speaker)
	Compression	G.711 compression,support two-way audio intercom,support audio and video synchronized output

Network	Wireless Standard	IEEE 802.11a,IEEE 802.11b,IEEE 802.11g,IEEE 802.11n
	Wireless Frequency Range	2.4GHz-2.4835GHZ
	Wireless Data Transfer Rate	802.11b : 11,5.5,2,1 Mbps 802.11a/g : 54,48,36,24,18,12, 9,6Mbps 802.11a/n : 300Mbps (MAX)
	Wireless Transmit Distance	Indoor 100M,outdoor 300M,according the local environment
	Ethernet	RJ-45 Ethernet
	Onvif Protocol	Supports NVR real time monitoring,recording and playback
Alarm	Motion Detection	Yes
	Alarm Setting	Supports Email,Phone push
	Alarm recording	Yes
Storage	MicroSD Card	Supports up to 128G microSD card for recording and playback
	Recording mode	Manual Record,Alarm Record,Timing Record
	View the video	Support Remote video playback
System	Interface	ICR,RS485,Battery,Audio,.....
	For Phone	Support IOS and Android system smart phones or tablet PCs
	For Windows PC	CMS supports1-,4-,6-,8-,9,16-64Channel IP Camera centralized monitor,record and playback on Windows PC

Weight	Package weight	20g	
	Accessories	User Manual	

Front board:

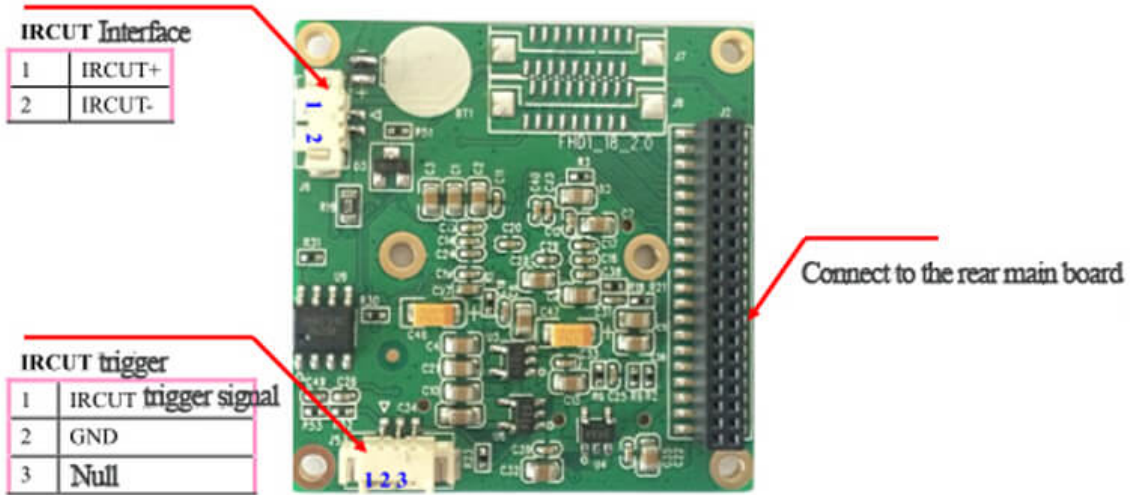

Rear board:

