


Shenzhen Enster Electronics Co.,LTD

CCTV 2M 1080P Sony STARVIS Image Sensor Circuit PCB
Board IP Module

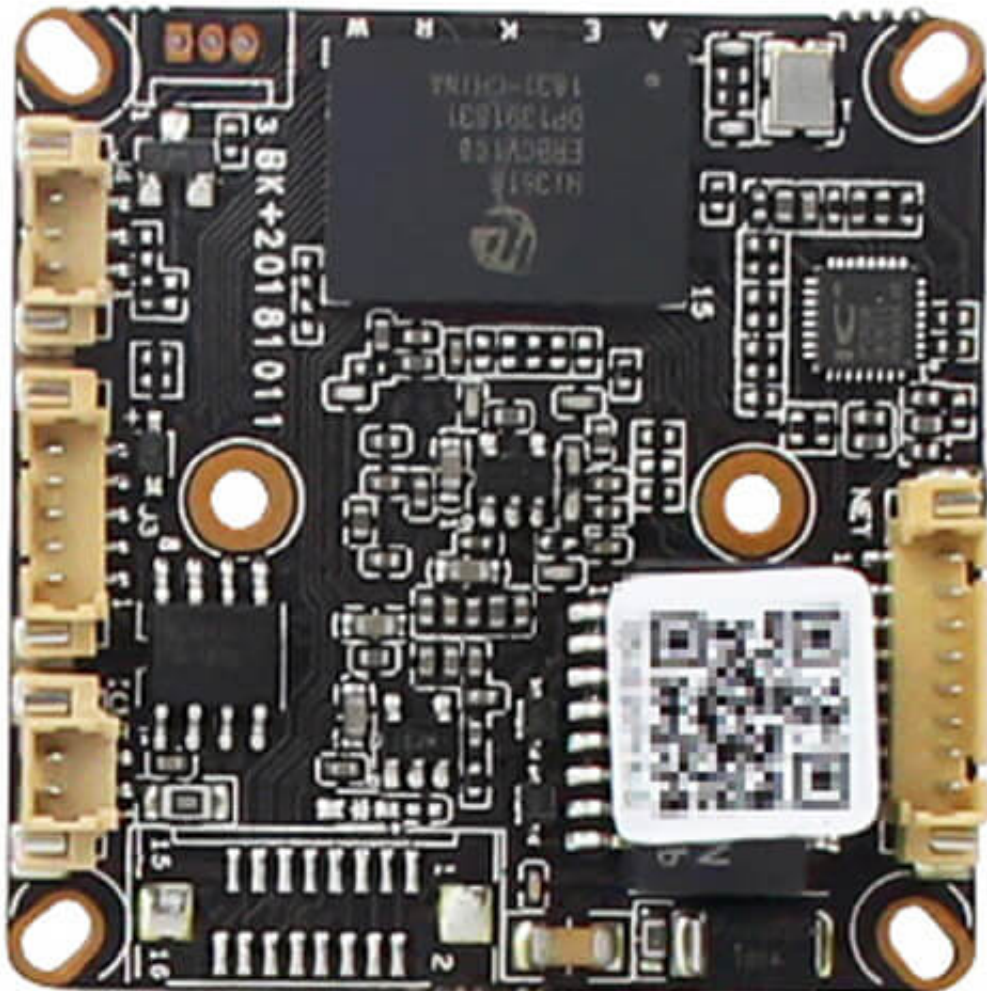

2M 1080p IP Module

SONY STARVIS IMAGE Sensor IMX307

HiSilicon DSP 3516E

Camera Type			
System			
Camera	Effective Pixels	2.0Meg Main 1920*1080 Sub stream	
	Frames Rates	PAL:25fps(NTSC:30fps	
	Image Sensor	1/2.8 " 2MP 2.07 megapixel resolu	
	DSP	Dual core IMX307	
	Min. Illumination	Color B/W 0.0001	
	Adjust Parameters	DWDR,BLC,DNR,AE,A	
	WDR	Support	
	DNR	2D	
	Video	Compression	H.265 M
		Stream	support dual stre
Bit Rate		support 0.1M ~8Mp	
Frame Rates		support 1~	
Audio	Input/Output Interface	1ch input(microphone),1ch output	
	Compression	G.711 compression,support two-way audio interco	
Alarm	Types	Motion Detection, Vi	
Network	WEB Browser	Support WEB remote config(IE, Sa	
	Smart Phone	mobile remote Monitor	

	CMS Software	Uniform CMS Software(multiple d
	Cloud P2P	www.enster.com ,MYEYE platfor
	Network	1 * RJ45,10/100M,Support RTSP/FTP/PP
	ONVIF	Support (C
	POE	Support(
	WIFI	N
General	Language	20 kinds of languages such as English, Finnish, French, G Spanish, Thai, S-Chinese
	IR Cut Filter	Set of double light s
	Lens Mount	Varifocal Lens
	Supplied Voltage	DC12V/PoE(8
	Power Consumption	Less tha
	Working Environment	-10 ° C~+60 ° Built in Heater being optional added for environ
	Weight	0.1